


## Hooked Blade

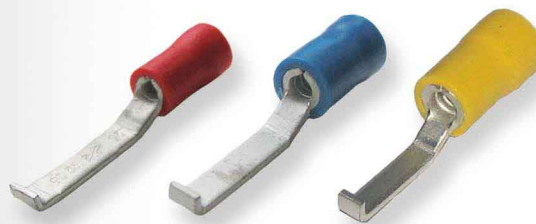

### Hooked Blade

**Material:** Copper

**Insulation:** Polyvinyl Chloride

UL approval E100455

CSA approval 093995

RoHS compliant



**Max. elec. rating:** ■ 19 amp

■ 27 amp

■ 48 amp

600 volts 75°C

Wire Range mm <sup>2</sup> (AWG)	Part No.	Dimensions mm										Vibration Resistant
		D1	D2	D3	D4	L	L1	H1	H2	T		
● 0.5-1.5 (22 - 16)	<b>30RHB</b>	1.7	2.1	3.0	4.3	26.5	10.0	22.0	5.5	0.8	<b>30RHB-VR</b>	
	<b>46RHB</b>	1.7	2.1	4.6	4.3	26.0	10.0	22.0	5.5	0.8	<b>46RHB-VR</b>	
● 1.5-2.5 (16 - 14)	<b>30BHB</b>	2.3	2.1	3.0	4.8	26.5	10.0	22.0	5.5	0.8	<b>30BHB-VR</b>	
	<b>46BHB</b>	2.3	2.1	4.6	4.8	26.5	10.0	22.0	5.5	0.8	<b>46BHB-VR</b>	
● 4-6 (12 - 10)	<b>30YHB</b>	3.4	2.4	3.0	6.5	30.0	13.5	23.0	6.5	0.8	<b>30YHB-VR</b>	
	<b>46YHB</b>	3.4	2.4	4.6	6.5	30.0	13.5	23.0	6.5	0.8	<b>46YHB-VR</b>	



Standard

Vibration Resistant

Pack Quantity: 100