


## Heatshrink Joint Kits

## Cable Repair Sleeves

### Traffic Light Kits

Part No.	Description
TLK1	Loop to armour feeder
TLK2	2 pair to 1, 2 or 3 loop
TLK3	1 pair to 2 or 3 loop
TLK4	1, 2 or 3 loop to 3 pair
TLK5	Loop to loop repair kit
TLK6	Traffic control multi-core
TLK7	Feeder to feeder armour

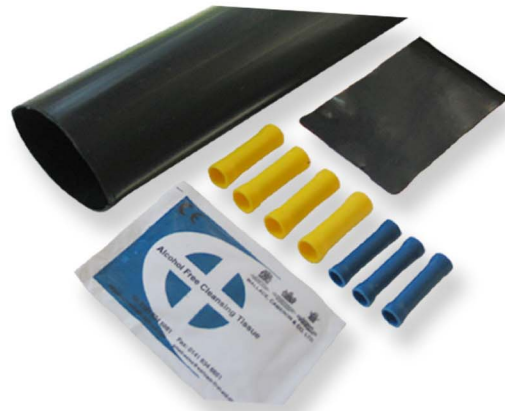

### Cable Repair Sleeve - Adhesive Lined

#### Application

Quick and simple to use cable repair sleeve. Thermoplastic adhesive.

#### Features

- Medium wall, halogen free
- Internal pressure max. 1.5 bar
- With hot melting adhesive
- High tensile strength
- Resistant to cold flow
- Very good chemical and electrical properties
- UV resistant
- Non-corrosive
- Minimum shrink temp: 125°C
- Operating temp: -40°C to +120°C
- Colour: black only



Part No.	Max. (mm)	Min. (mm)	Wall thickness after shrink (mm)	Length (mm)
SRMAHV28-10	28	10	2.3	1500
SRMAHV43-12	43	12	3.4	1500
SRMAHV72-18	72	18	3.4	1500
SRMAHV93-26	93	26	3.4	1500
SRMAHV115-30	115	30	2.3	1500
SRMAHV125-32	125	32	2.3	1500